

EN

24 LUG[®]
7 BOX

TOP PERFORMANCE
COST-EFFECTIVE
LED LUMINAIRES



A++



3 year
warranty



50 000h
lifetime



easy
mounting

123
lm/W

high
efficacy

LUGSTAR

LB LED GEN.2 recessed

 DIRECT REPLACEMENT FOR
2x18/26/42W



Decorative downlight luminaire for suspended ceilings, degree of water and dust-proof IP20 and IP44, for LED light sources.

Key features:

- Perfect for office and school applications
 - **Efficacy > 100 lm/W**
 - UGR < 19
 - Up to **60%** energy savings compared to conventional technology
 - 50 000 h lifetime
 - Fast and easy mounting
 - Universal design
 - Return on investment < 2 years
- Available versions: DALI, Wieland, Emergency kit
 - Power LED: 16 / 22 / 39 W
 - Power luminaire: 18 / 24 / 44 W
 - LED lumen: 2300 - 5300lm
 - Luminaire lumen: 1900 - 4100 lm
 - Beam angle: 70°
 - Colour Temperature: 3000 / 4000 K
 - CRI: >80 Ra
 - Dimensions: 240x140 mm
 - Weight: 0,7 / 1,3 kg

LUGSTAR

LB LED surface mounted

 DIRECT REPLACEMENT FOR
2x18/26W



Decorative surface mounted luminaire for LED light sources.

Key features:

- Perfect for halls, shopping centers and galleries
 - **Efficacy > 100 lm/W**
 - UGR < 19
 - Up to **60%** energy savings compared to conventional technology
 - 50 000 h lifetime
 - Fast and easy mounting
 - Return on investment < 2 years
- Power LED: 16 / 22 / 39 W
 - Power luminaire: 18 / 24 / 44 W
 - LED lumen: 2300 - 5500 lm
 - Luminaire lumen: 1900 - 4100 lm
 - Beam angle: 70°
 - Colour Temperature: 3000 / 4000 K
 - CRI: >80 Ra
 - Dimensions: 242x238 mm
 - Weight: 1,7 kg

TINO

LB LED

 DIRECT REPLACEMENT FOR
35W



Modern, interior spotlight for LED light sources, adjusted for direct connection to a 3-phase track, no driver required


Key features:

- Perfect for retail applications
 - Reduced UV radiation
 - Reduced IR radiation
 - Up to **40%** energy savings compared to conventional technology
 - Alternatively: warm and cold colour temperature
 - Universal simple design
- Power LED: 25 / 26 W
 - Power luminaire: 25 / 26 W
 - LED lumen: 2000 / 3000 lm
 - Luminaire lumen: 1550 / 2050 lm
 - Beam angle: 20°, 40°
 - Colour Temperature: 3000 / 4000 K
 - CRI: >80 Ra
 - Dimensions: 145x88x200 mm
 - Weight: 1,0 kg

OFFICE

LB LED

 DIRECT REPLACEMENT FOR
3x14W, 4x14W

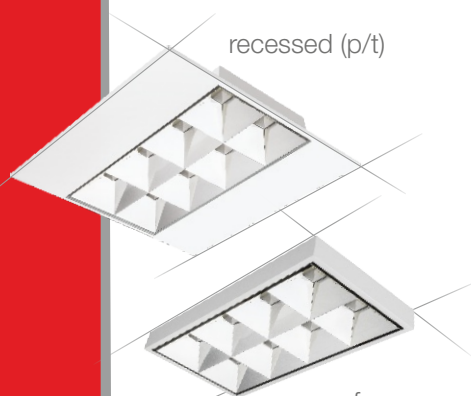

recessed (p/t)

Modern luminaire for LED light sources available in two versions: recessed and surface mounted.

Key features:

- Perfect for offices, conference and computer rooms
 - **Efficacy > 100 lm/W**
 - UGR < 17
 - Up to **60%** energy savings compared to conventional technology
 - 50 000 h lifetime
 - Return on investment < 2 years
- Power LED: 26 / 35 W
 - Power luminaire: 29 / 39 W
 - LED lumen: 2800 - 4100 lm
 - Luminaire lumen: 2850 - 4000 lm
 - Colour Temperature: 3000 / 4000 K
 - CRI: >80 Ra
 - 3 louver versions available: gloss, mat, mat white

surface mounted (n/t)

DIRECT REPLACEMENT FOR
4x14W T5

LUGCLASSIC


LB LED recessed

24 LUG[®]
7 BOX

Modern recessed luminaire for LED light sources emitting light with it's entire diffuser surface.

Key features:

- Perfect for corridors school and office applications
- **Efficacy > 100 lm/W**
- Min. **50%** energy savings compared to conventional technology
- Fast and easy mounting
- Alternatively: warm and cold colour temperature
- Universal and slim design
- Power LED: 35 W
- Power luminaire: 39 W
- LED lumen: 4900 / 5100 lm
- Luminaire lumen: 4150 / 4350 lm
- Colour Temperature: 3000 / 4000K
- CRI: >80 Ra
- Available in two sizes: 600x600 and 625x625 mm
- Weight: 4,0 / 4,2 kg

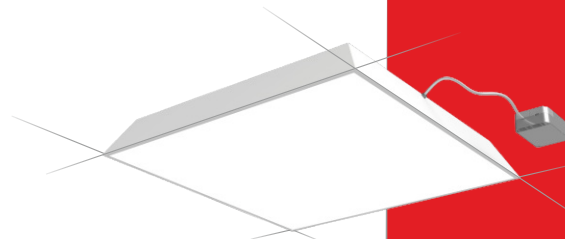

DIRECT REPLACEMENT FOR
1x39W, 2x39/35W

LUGLINE

LB LED

Modern continuous line luminaire featuring LED light sources.

Key features:

- Perfect do retail applications
- **Efficacy > 100 lm/W**
- Fast and easy mounting
- Alternatively: warm and cold colour temperature
- Universal and compact design
- Available in two lengths
- Power LED: 26 / 51 W
- Power luminaire: 31 / 63 W
- LED lumen: 3500 - 7200 lm
- Luminaire lumen: 3200 - 6800 lm
- Colour temperature: 3000 / 4000 K
- CRI: >80 Ra
- Dimensions: 1014/2014x40x60 mm
- Weight: 2 / 4 kg



DIRECT REPLACEMENT FOR
2x36/58/80W

ATLANTYK

LB LED GEN.2

Hermetic LED luminaire, water-jet protected, dedicated to use in industrial environments.

Key features:

- Perfect for parking lots, outdoor roofings, production halls
- **Efficacy > 120 lm/W**
- Up to **60%** energy savings compared to conventional technology
- 50 000 h lifetime
- Fast and easy mounting
- Return on investment < 2 years
- Suspended or surface mounted
- Power LED: 32 - 72 W
- Power luminaire: 35 - 77 W
- LED lumen: 4900 - 11500 lm
- Luminaire lumen: 4300 - 10000 lm
- Colour Temperature: 3000 / 4000K
- CRI: >80 Ra
- Dimensions: 1340x84x99 / 1575x134x99 mm
- Weight: 1,7 / 3,8 kg



DIRECT REPLACEMENT FOR
2x36/58W

RAYLUX

LB LED

Modern surface mounted luminaire for LED light sources.

Key features:

- Perfect for classrooms, corridors, conference rooms
- **Efficacy > 110 lm/W**
- 50 000 h lifetime
- Universal design
- Operating temperature range from 0° C to 30° C
- Return on investment < 2 years
- Power LED: 32 / 47 W
- Power luminaire: 35 / 51 W
- LED lumen: 4600 / 7100 lm
- Luminaire lumen: 4050 / 5900 lm
- Colour Temperature: 4000 K
- CRI: >80 Ra
- Dimensions: 1235x95x72 / 1535x95x72 mm



Find out more on **LUGBOX24.com**

CRUISER 2 LB LED

 DIRECT REPLACEMENT FOR
400W

industrial luminaire for LED light sources.



Key features:

- Perfect to industrial and sport facilities
 - **Efficacy > 105 lm/W**
 - 50 000 h lifetime
 - Universal design
 - Return on investment < 2 years
- Power LED: 192 / 154 W
 - Power luminaire: 214 / 171 W
 - LED lumen: 25000 / 20000 lm
 - Luminaire lumen: 22500 / 18000 lm
 - Beam angle: 100°
 - Colour temperature: 4000K
 - CRI: 80 Ra
 - Dimensions: 600x410x90 mm

CRUISER LB LED

 DIRECT REPLACEMENT FOR
250W

industrial luminaire for LED light sources.



Key features:

- Perfect to industrial and sport facilities
 - **Efficacy > 112 lm/W**
 - 50 000 h lifetime
 - Universal design
 - Return on investment < 2 years
- Power LED: 130 W
 - Power luminaire: 145 W
 - LED lumen: 19300 lm
 - Luminaire lumen: 16200 lm
 - Beam angle: 116°
 - Colour temperature: 4000 K
 - CRI: 80 Ra
 - Dimensions: 540x338x102 mm

PLAO LB LED

 DIRECT REPLACEMENT FOR
60W, 100W

Modern plafond supplied with LED light source.



Key features:

- Perfect to retail and horeca applications
 - Large energy savings compared to conventional technology
 - Alternatively: warm and cold colour temperature
 - Universal and simple design
- Power LED: 8 / 12 W
 - Power luminaire: 10 / 14 W
 - LED lumen: 1080 - 1680 lm
 - Luminaire lumen: 650 - 1010 lm
 - Colour temperature: 3000K / 4000 K
 - CRI: >80 Ra
 - Dimensions: 260x95 mm
 - Weight: 0,8 kg

TOP PERFORMANCE
COST-EFFECTIVE
LED LUMINAIRES

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LUGBOX_Best_Profits_01.2016_EN

Proudly made by



LUGBOX24.com

LUG Light Factory Ltd.

Gorzowska 11, 65-127 Zielona Góra, Poland
export@lug.com.pl